


## Dimensions (in cms):

	RB100	RB125	RB150	RB200
a	210	250	300	350
b	135	190	210	250
c	175	240	250	290
d	170	200	250	300
e	240	280	320	370

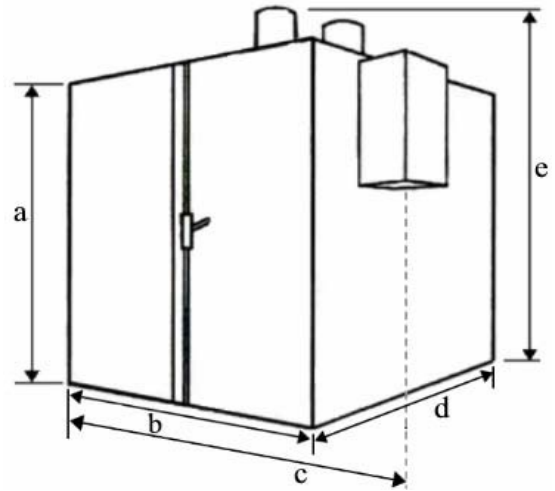

## Technical Specification:

	RB100	RB125	RB150	RB200
Power requirements:	75 kW	110 kW	180 kW	240 kW
Weight (tonnes):	0.5 t	1.0 t	1.8 t	3.0 t
Usable internal space:	1.0 m <sup>3</sup>	1.95 m <sup>3</sup>	3.37 m <sup>3</sup>	8.0 m <sup>3</sup>

## All Models:

Electricity supply: 415 V, 3 phase and neutral, 50 or 60 HZ

Temperature range: Ambient to 450°C

Cycle: Fully

## Features:

Explosion panel fitted for safety

Over-temperature device prevents runaway

Circulation fan to equalize temperature

Latest specification insula

Single front door on RB100 and RB125

Double doors at front of RB150 and RB200

RB125 shown